


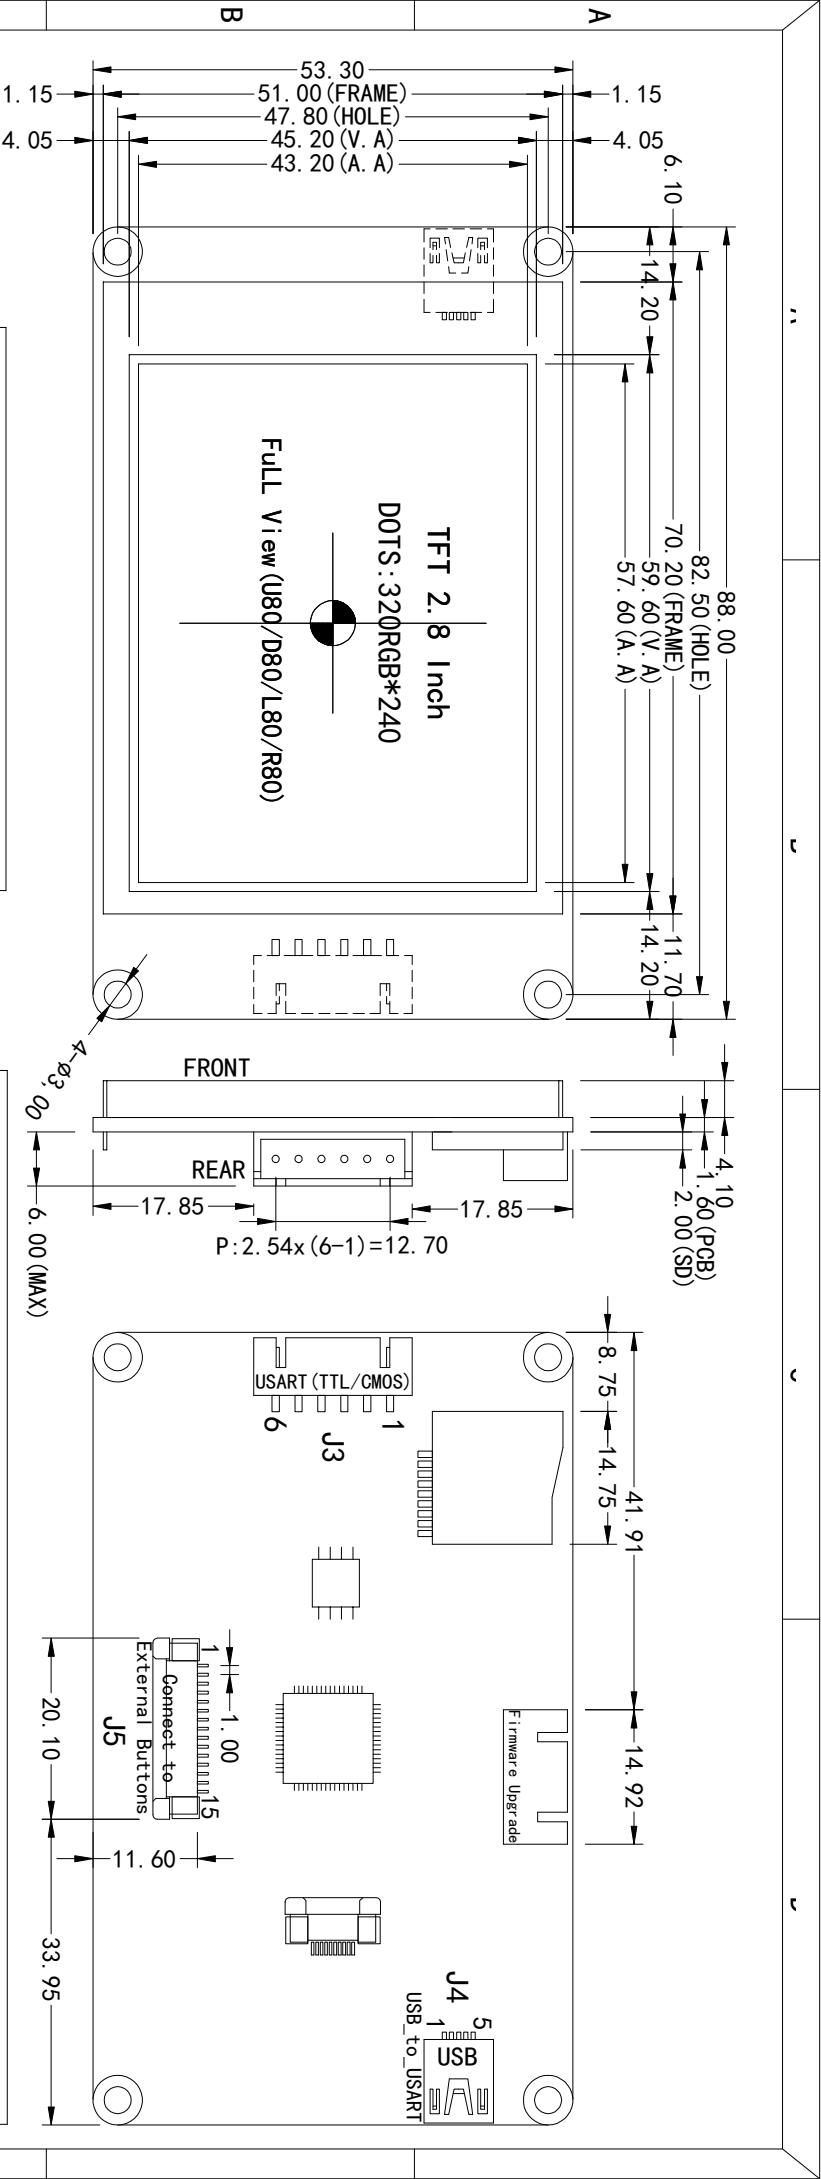

J3	
No.	Name
1	VDD
2	GND
3	USART_TX
4	USART_RX
5-6	NC


J4	
No.	Name
1	VDD
2	D-
3	D+
4	ID
5	GND

J5	
No.	Name
1	PC8
2	PC9
3	PC0
4	PD1
5	PD2

J4	
No.	Name
1	VDD
2	D-
3	D+
4	ID
5	GND

D	液晶显示类型 LCD Display Type	薄膜晶体管/透射式/带黑/262K 色 TFT/Transmissive/Normally Black/262K COLOR
	观看方向/角度 Viewing Direction	Full View (U80/D80/R80/L80)
	接口 Interface	USART Serial (TTL/CMOS)/USB to Usart
	工作电压 Operating Voltage	VDD=5.0V(Typ)
	TFT 工作温度 TFT Operating Temp	-30 °C ~ 80 °C

A		B		C		D	
液晶模组亮度 LCD Brightness		背光 Backlight		500 cd/m² (Typ)/固定电流测试		ST-MCU+ST7789	
TFT 存储温度 TFT Storage Temp		驱动芯片 Driver IC		-30 °C ~ 80 °C		白色/6 LEDs/1灯串联4路并联	
TFT 工作温度 TFT Operating Temp		背光 Backlight		500 cd/m² (Typ)/固定电流测试		白色/6 LEDs/1灯串联4路并联	
TFT 工作温度 TFT Operating Temp		背光 Backlight		500 cd/m² (Typ)/固定电流测试		白色/6 LEDs/1灯串联4路并联	

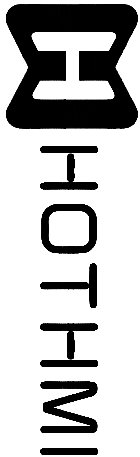

产品型号 HTM-H028A16-USART-ST V2.0

比例 1:1
版本 V2.0
单位 MM
公差 ±0.3